


Standard loose tube non armoured optical cable	GYTS	From 218 to 288	LFOC
--	------	-----------------	------

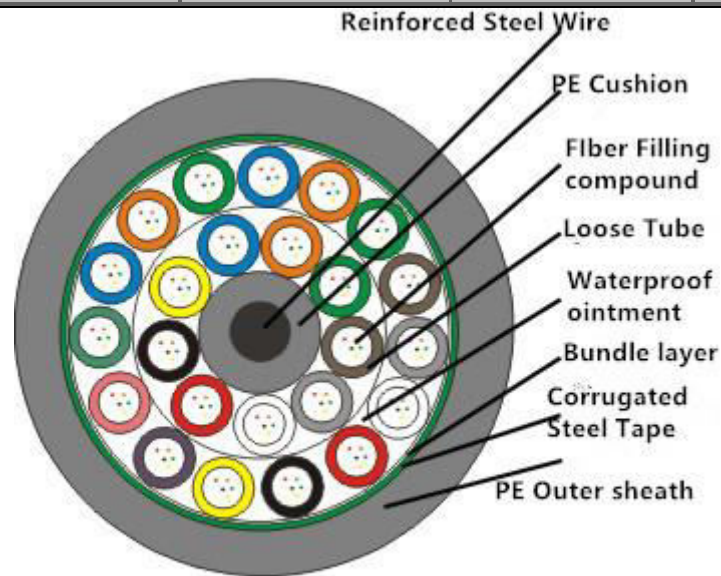

GYTS 288.Fibers  
Structure size

The serial number	Name of the element	Nominal size	note
1	Center reinforced phosphating wire diameter,mm	2.0	
2	Steel wire coating diameter, mm	4.3	
3	Loose casing size, OD/ID, mm	2.1/1.5	
4	Double-sided steel-plastic composite belt, thickness × width, mm	0.25 x 48	The strip thickness of 0.15
5	MDPE jacket nominal thickness, mm	1.8	
6	Cable sheath diameter, mm	17.6	
7	Weight of optical cable per kilometer, kg/km	296	

Technical parameters

The serial number	project	parameter
1	Loose tube chromatography	Tube: blue, orange, green, brown, gray, red, black, yellow Cover: blue, orange, green, brown, gray, Ben, red, black, yellow, purple, pink, turquoise, blue, orange, green
2	Number of loose sleeves/number of filled ropes	19 ~ 24/5 ~ 0
3	Optical chromatography	Blue, orange, green, brown, gray, Ben, red, black, yellow, purple, pink, turquoise
4	Number of optical fibers per tube	2 ~ 12
5	Maximum allowable tension (N)	3000 (short-term, laying time), 600 (long-term, working time)

6	Maximum allowable flattening force (N/10cm)	1000 (short term, laying time), 300 (long term, working time)
7	Allowable minimum bending radius (mm)	20D (short-term, when laying), 10D (long-term, when working), D is the optical cable diameter
8	Cable life	Not less than 25 years
9	Suitable temperature	- 40 °C ~ +60°C
10	Laying way	Pipeline, overhead
11	Optical cable surface marking	Company logo (LFOC), cable model specifications, year of production, meter length
12	packaging	Wooden plate